gracewood

Welcome to Gracewood, nestled in the heart of the countryside, in the charming town of Mallala, South Australia. Gracewood offers a haven for those ready to build an idyllic life, a large and spacious home with all of the modern comforts, while embracing the unparalleled warmth of regional living.

For the life you want, choose Gracewood.

LEGEND

- Auture Early Learning Co
- Playground
- 1 0 Dog Park
- 0 Walking Porths
- 0
- 0
- 0 BBQ Facilities
- 0







CONTENTS

1.0	VISION FOR GRACEWOOD	3
2.0	THE DESIGN GUIDELINES	4
3.0	THE APPROVAL PROCESS	4
3.1	Re-Submission	4
4.0	DWELLING SITING	6
4.1	Siting for Aspect & Energy Efficiency	7
4.2	Front Setbacks	7
4.3	Side & Rear Setbacks	7
4.4	Corner Lots	7
4.5	Garage Sites	7
5.0	DWELLING DESIGN	8
5.1	Building Articulation & Massing	9
5.2	Corner Lots	9
5.3	Roofing	9
5.4	Building Height	10
5.5	Balconies, Verandahs, Porticos	10
5.6	Garages	10
5.7	Materials & Colours	11
5.8	Driveways	11
5.9	Fencing	12
5.10	Dwelling Services & Other Structures	12
5.11	Energy Efficiency	13
5.12	Passive Design	13
5.13	Front Landscaping	13
5.14	Window Furnishings	13
5.15	Signage	13
5.16	Dwelling Completion Timeframe	13
5.17	Dwelling Presentation	13
6.0	GENERAL INFORMATION	14
7.0	DESIGN GUIDELINES CHECKLIST	15





gracewood

1.0 VISION FOR GRACEWOOD

We will be the driving force that unlocks more opportunities for all Australians to achieve their home ownership dreams, in Mallala.

Our creation of home solutions will allow our residents to enjoy the utmost in home comforts without sacrificing on a fulfilling and vibrant lifestyle.

We will establish a genuinely supportive, family-focused and secure community that our residents proudly call home.

2.0 THE DESIGN GUIDELINES

The Design Guidelines for Gracewood will ensure that a consistent, high standard of homes and landscaping that achieves the Gracewood "vision", are provided.

The Design Guidelines are intended to assist you in considering the design of your home and landscaping so they can contribute to, and enhance the overall character of Gracewood.

Furthermore, the Design Guidelines will also assist with facilitating building designs that not only comply with the National Construction Code and the Planning and Design Code, but also strive to protect the investment you have made at Gracewood, by ensuring a high quality of design and construction of your home.

3.0 THE APPROVAL PROCESS

To achieve a superior outcome at Gracewood, all building designs must be approved by the Design Review Panel (DRP) before you are able to obtain building rules consent from Adelaide Plains Council or building certifier. The developer may modify the Guidelines from time to time. Building designs must also comply with the Building Regulations of South Australia which will be addressed by your builder and building certifier.

Applications for approval must be submitted to the Gracewood Design Review Panel (DRP) via email to drp@gracewood.com.au.


The submission must include:


- A completed Application Form
- A siting plan of the home on the lot with dimensions and setbacks from all boundaries, proposed fencing and driveway location
- Floor plans that show the layout of the home indicating all rooms, windows, external doors, external fixtures and nominated floor levels
- Full elevations indicating wall heights and all external finishes including garage door type
- Elevations or cross sections showing roof pitches, eaves depth and height of walls along the boundaries; Colour selection (External Only)

3.1 RE-SUBMISSION

Where plans do not comply with the Guidelines, the DRP will advise of issues. Revised plans should then be resubmitted to the DRP explaining the changes for reassessment and approval. An allowance has been made for two submissions for each house. Further submissions will incur an administration fee.

THE APPROVAL PROCESS CAN BE SUMMARISED IN THE FOLLOWING FLOW CHART:

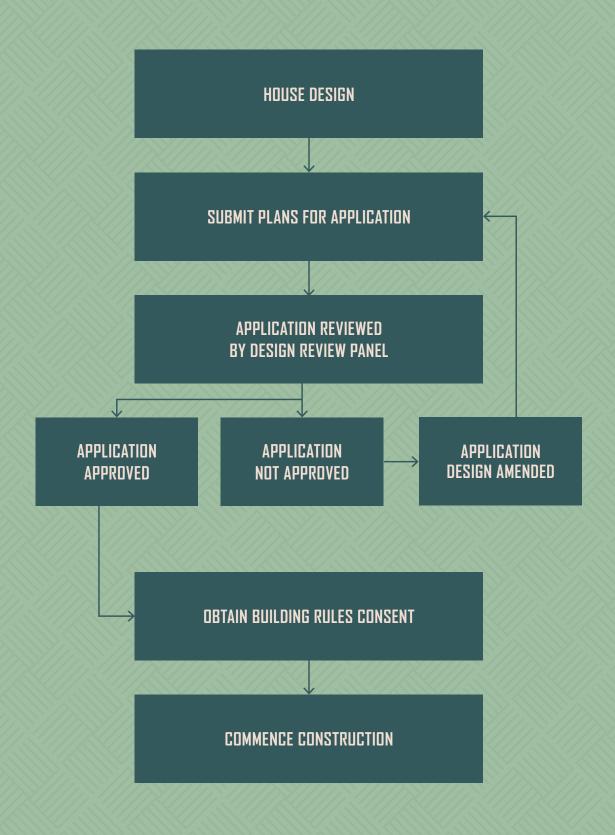

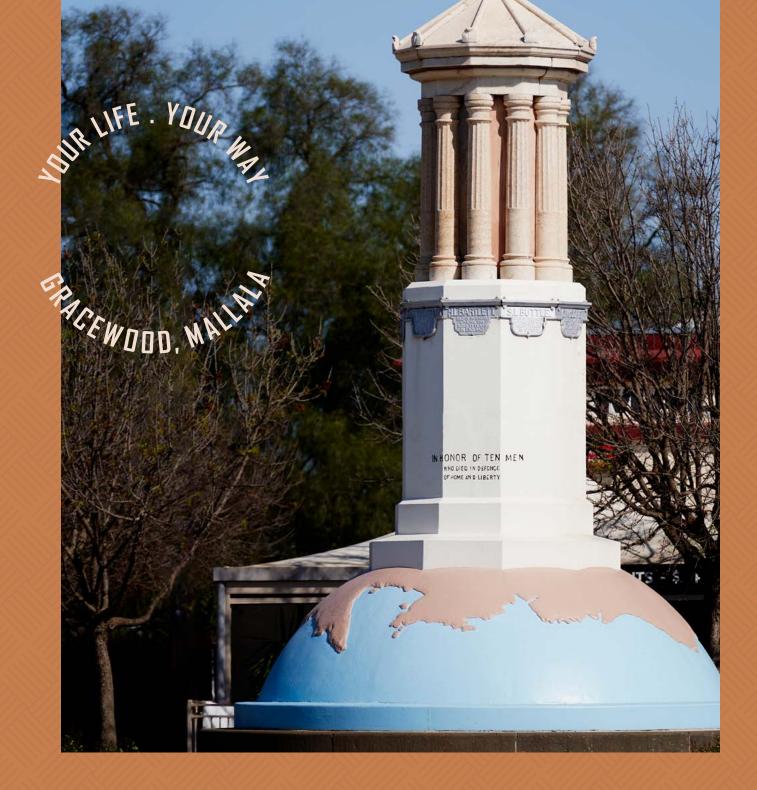

4.0 DWELLING SITING

Siting guidelines will ensure homes in Gracewood will have appropriate solar orientation and building setbacks to enhance the streetscape, ensure good passive solar design and prevent overlooking and overshadowing of adjoining homes.

4.1 SITING FOR ASPECT & ENERGY EFFICIENCY

Dwellings should take advantage of appropriate access to natural sunlight and living areas should be orientated to face north where possible.

Outdoor living areas should be located where they will receive direct access to natural sunlight.

The planting of larger shrubs and trees should enable the winter sun to penetrate your living areas and outdoor areas, as well as offering necessary shade in warmer months.

4.2 FRONT SETBACKS

Dwellings must achieve a minimum front setback of 5.0m from the front boundary.

Your building certifier will be able to advise you how the Planning and Design Code requirements can be incorporated into your home design.

4.3 SIDE & REAR SETBACKS

Dwellings must achieve a minimum side setback of 0.9m and a minimum rear setback of 4.0m.

Double Storey dwellings must achieve a minimum 'upper level' side setback of 1.9m and a minimum 'upper level' rear setback of 6.0m.

Your building certifier will be able to advise you how the Planning and Design Code requirements can be incorporated into your home design.

4.4 CORNER LOTS

On corner lots, homes must address both street frontages and provide the primary address to the front boundary, which is generally the shorter of the two street frontages and the same frontage to that containing the garage.

Standard front setback requirements apply to corner lots.

On secondary street frontages, dwelling setbacks must comply with ResCode requirements.

Garages facing the secondary street frontage must be set back a minimum of 2.0m from the lot boundary.

4.5 GARAGE SITES

Except for rear-loaded lots (where garages are accessed from the rear of a lot), garages must be set back 5.5m from the primary street frontage to provide a visitor car space between the garage and front boundary and avoid cars overhanging the footpath.

Garages should be set back a minimum of 0.5m behind the front building line of the house.

On corner lots where garages are in from the secondary street, a garage must be located at the furthest point away from the intersection of streets.

7

^{*}Subject to council consent.

^{*}Subject to council consent.



5.0 DWELLING DESIGN

Siting the design of each home in Gracewood contributes the achievement of the Vision for the community as a high quality, modern residential environment. Requirements for important aspects of home design are described on the next page.

EACEWOOD, WALLAND

5.1 BUILDING ARTICULATION & MASSING

The overall form and proportions of new homes should be articulated using variation of materials and colours, varied locations of windows, porches and porticos, larger eaves, and recessed upper storeys as shown in Figure 1.

Dwellings should provide genuine and well proportioned windows to street frontages to enhance dwelling presentation and facilitate passive surveillance of streets. Double storey dwellings should provide genuine windows to ground and first levels, eave returns are required to continue around the full upper storey for all non-corner lots.

All visible walls must be effectively articulated and include appropriate arrangement of windows as shown in Figure 2.

Blank walls visible from the street or areas of public open spaces must be avoided.

5.2 CORNER LOTS

On corner lots, visible walls within the secondary street frontage should be articulated and detailed to the same standard as the front façade of the dwelling.

The front façade of a dwelling must return 3.0m along the secondary frontage, so the dwelling engages with the secondary frontage. Side fencing on the secondary frontage should not commence within 3.0m of the front building line so that corner treatments are visible from the street.

Building design elements which integrate the primary and secondary elevation of the dwelling should be provided as shown in Figures 3a and 3b. This may include wrap-around verandahs, feature windows, variety of materials and building articulation.

5.3 ROOFING

Roofing is an integral part of the architecture of your home. Roof forms should be pitched or skillion and incorporate a combination of hips or gables to articulate the roofline. Flat roof may be considered at the discretion of the DRP and generally this will only be for lots less than 300m^2 . Plain or single-hipped roofs will not be permitted. See Figure 4 for an example.

Pitched roofs are to be designed at a minimum of 22°. Alternative roof forms including combinations will be considered by the DRP provided they contribute to the merit of the dwelling design and the vision for Gracewood.











9

All pitched roofs are to have a continuous minimum 450mm eave along street frontages (primary and secondary).

On single storey dwellings, eaves must return a minimum of 3.0m from the front façade. Corner lot single storey dwellings must continue the minimum 450mm eave to both street frontages and the entire upper level on double storey dwellings.

Where a dwelling or garage wall is constructed on a side boundary, no eave is required.

5.4 BUILDING HEIGHT

Single storey dwellings should have a maximum overall height of 6.0m. Double storey dwellings should have a maximum overall height of 9.0m.

5.5 BALCONIES, VERANDAHS, PORTICOS

Balconies, verandahs and porticos add interest, architectural appeal and serve to activate the street. All homes are required to have at least one balcony, verandah or portico facing the street which denotes the main entry to the dwelling. These features should complement the architectural style of the dwelling, provide weather protection and have a clear path to the street as shown in Figure 5.

On lots greater than 300m² porticos should have a minimum area of 4.0m². On lots smaller than 300m², porticos should have a minimum area of 3.0m².

All porticos must have a minimum depth of 1.0m.

5.6 GARAGES

Garages must be incorporated into the main roofline of the dwelling to reduce the visual impact the garage has on the façade and streetscape.

Please ensure that your builder or architect refer to the Local Planning and Design Code.

A Triple garage and/or side access may be considered on a case-by-case basis for each lot with a width of 18.0m or more.

Garage doors shall not comprise more than 50% of the lot frontage, or more than 50% of the total front façade areas for double storey dwellings. The garage door must be constructed of slimline, sectional or tilt panels.

Carports are not permitted.

Commercial/recreational vehicles, boats, caravans, trucks and other mobile machinery must not be stored where they are visible from the street and must be contained solely within the rear yard.



5.7 MATERIALS & COLOURS

To create variation and interest in the façade, a variety of materials, colours and finishes should be used on each dwelling. A minimum of two colours and/or materials should be used for the face of any wall visible from the street unless agreed by the DRP for exceptional design outcomes with demonstrated architectural merit.

Walls visible from the street may be constructed from the following materials:

- Brickwork
- Exposed timber
- Hardiplank
- Mini orb sheeting
- · Painted Colorbond®, Alucobond
- Render
- Slate tiles
- Lightweight cladding

Use of materials including plain cement sheeting; plain concrete blocks; corrugated cement sheeting; zinc or aluminium coated steel and brick bagging are not permitted on walls visible from the street. Industrial treatments of external walls visible from the street will be considered on architectural merit by the DRP. Lightweight materials are not permitted above openings such as doorways and windows where visible from a street or public area (except when integral to the architectural character). A complementary palette of colours selected from natural tones that are harmonious with the landscape and should be incorporated into dwelling presentation.

Limited use of strong, bold colours should generally be minimised; however it will be considered by the DRP where it highlights elements in a contemporary dwelling design.



5.8 DRIVEWAYS

One crossover location is permitted to each lot. Driveways shall not exceed the width of the garage – driveways should be tapered to match the crossover width as shown in Figure 6.

Plain asphalt or concrete driveways are not permitted. Driveways, pathways and porches in the front yard may be constructed from the following list of materials:

- Coloured concrete
- Textured finishes
- Paving
- Exposed aggregate
- Stamp-Crete

The driveway must be completed within 30 days of occupancy of the dwelling.



11

5.9 FENCING

Front fencing forward of the dwelling is not permitted. For all corner lots, side fencing on the secondary frontage should not commence within 3.0m of the front building line so that corner treatments in the dwelling are visible from the street.

Side and rear boundary fencing must be constructed of Colorbond® Woodland Grey. Fencing must be a minimum of 1.8m and maximum of 1.95m. See figure 7.

Side boundary fences must finish at least 500mm behind the front wall of a dwelling. Side boundary fences must return at 90 degrees to meet the dwelling or garage at least 500mm behind the front dwelling wall.

These fences must be constructed in Colorbond® Woodland Grey.

As highlighted, low front fencing may be appropriate on designated medium density housing sites within Gracewood.

The DRP will consider suitable fencing in applications for this housing and seek direction from Adelaide Plains Council. All proposed fencing locations must be shown on plans submitted to the DRP for approval.

5.10 DWELLING SERVICES & OTHER STRUCTURES

Non-permanent structures such as sheds, antennas, satellite dishes, conditioning units and rainwater tanks must not be visible from the street and must not protrude above the roofline.

Solar hot water heaters, antennas, satellite dishes, evaporative units, Photo Voltaic Cells, Solar Panels and the like cannot be located on the front elevation of the dwelling. These are encouraged to be located behind return side fencing.

External plumbing, particularly from upper storeys, must be painted in colours to match the dwelling and not be visible from the street or abutting public open space or be concealed or screened.

Any outbuilding structure with a wall or roof exceeding 20m², will not be permitted unless:

 The structure otherwise matches or complements the dwelling in terms of materials, design and external appearance (including colour and the quality of construction)



5.11 ENERGY EFFICIENCY

Internal light fittings such as down lights, pendants, wall mounts etc. are encouraged to allow for compact fluorescent or LED lights.

External light fittings should not result in excessive light spill. Energy efficient appliances should be considered.

Zone dwelling layout is encouraged to enable main living areas to be separately heated and cooled. Your home is required to meet a 6 Star Energy Rating in accordance with the Sustainable Energy Authority's House Energy Rating Scheme. Your building surveyor will assist you in appropriately satisfying these requirements when you design your home.

5.12 PASSIVE DESIGN

Where possible, locate living spaces with a northern aspect to facilitate solar access in winter months.

Where possible, use shading devices such as eaves, pergolas, trees, tinted glass etc. to prevent excessive summer heating. Where possible, locate private open space with a northern aspect and sufficient dimensions to minimize overshadowing.

5.13 FRONT LANDSCAPING

Landscaping to the front street view of the lot must be completed within 6 months of the issue of the Certificate of Occupancy.

At least 50% of the front garden must consist of soft landscape items such as turf, garden beds, ground covers and other permeable surface materials including decorative stone aggregate or pebbles.

It is recommended that low maintenance and drought tolerable native species are planted when selecting species for front landscapes.

The front nature strip is to consist only of grass. No other materials such as gravel or pebbles are allowed. No artificial turf to be allowed

The verge (nature strip) on both the front and secondary streets is considered part of your landscape. It should be completed and maintained in accordance with Gracewood's Community requirements. Your attention to this will have a lasting and positive impact on the overall streetscape environment.

5.14 WINDOW FURNISHINGS

Sheets, blankets or similar materials for which window furnishing is not their primary use, are not permitted. Internal window furnishings which are visible from the public realm should be fitted within 3 months of the Certificate of Occupancy permit being issued. Any external shutters or roller blinds are not permitted.

5.15 SIGNAGE

Signs to advertise the sale of a vacant lot are not permitted unless approved by the Developer. One sign only may be erected to advertise the sale of a completed dwelling.

5.16 DWELLING COMPLETION TIMEFRAME

Construction of all homes should commence within 24 months of settlement and must be completed within 42 months.

5.17 DWELLING PRESENTATION

Lots must remain tidy at all times prior to, during and following house construction. It is the owners responsibility to ensure builders adhere to this and the site remains tidy and presentable as much as possible during construction. Construction rubbish must be confined to designated areas and be removed frequently. Any damage to council assets including footpaths and crossovers is also the responsibility of the owner.

13



6.0 GENERAL INFORMATION

EFACEWOOD, MALLAN

These Guidelines are a legally binding part of your contract and you are required to adhere to them. From time to time, designs may not comply with these guidelines, in part or in whole. While we make every effort to retain consistency, the developer, reserves the right to approve or refuse any design based on architectural merit, to allow innovative and contemporary designs to be considered.

In particular circumstances there may be regulations or special requirements in addition to this document. Where conflict occurs between this document and special requirements, the special requirements take precedence.

These will discontinue five years from the date of completion of the last stage of development and will revert to any Government requirements at that time. These guidelines are in addition to, not in lieu of, any other Government requirements. To learn about these, please refer to Part IV of the Building Regulations and the Bendigo Planning Scheme.

The following checklist has been developed to ensure your house, fencing and landscape comply with the Guidelines. When submitting your plans, please enclose this checklist completed for the DRP approval.

7.0 DESIGN GUIDELINES CHECKLIST

Wel.Co highly recommend that prior to land settlement you seek the consultation of a recognised builder to commence the development of your home plans in alliance with these Guidelines to ensure sufficient time for approvals.

GUIDELINE	YES	NO		
VISION FOR GRACEWOOD				
Are the required setbacks for your home achieved?				
Does your home have the required one balcony, verandah or portico facing the street?				
CORNER LOT DWELLINGS				
Are all visible walls detailed to the same quality as the front elevation?				
ROOFING				
Does your roof include a combination of hips?				
Does your roof achieve a minimum pitch of 22 degrees?				
Does your house meet the minimum eave requirements?				
GARAGING				
Is your garage located behind the front wall of the dwelling?				
Is the garage set back a minimum of 5.0m from the front boundary?				
DRIVEWAY				
Is the driveway an approved material as established in the guidelines?				
MATERIALS				
Is the dwelling constructed of materials identified in the guidelines?				
FENCING				
Is your fencing consistent with the design guidelines?				
Have you shown the type and location of fencing on your house plans?				
ENERGY EFFICIENCY				
Does your house meet the required 6 Star Energy Rating?				
SERVICES AND NON-PERMANENT STRUCTURES				
Does your home design include NBN requirements?				
Are there any structures such as sheds, antennas, Gracewood conditioning unitsand/or rainwater tanks visible from the street?				
Are all services such as hot water heaters, plumbing, photo voltaic cells, solar panels etc. located away from the front elevation of the dwelling?				

VERSION 1 gracewood.com.au

15

CONTACT US1800 952 000
enquiries@gracewood.com.au

gracewood.com.au



These Guidelines are a legally binding part of the Property's contract of sale and you are required to adhere to them. While we make every effort to retain consistency of design in the development, we reserve the right to approve or refuse any design, at our sole discretion, to allow innovative and contemporary designs to be considered. In particular circumstances, there may be regulations, law or special requirements in addition to these Guidelines (collectively "Special Requirements"). Where conflict occurs between these Guidelines and the Special Requirements, the Special Requirements take precedence. These Guidelines will cease to apply after 10 years from the date of completion of the last stage of the development. These Guidelines are in addition to, not in lieu of, any regulation or legal requirement. At all times, the design and construction of your Property must meet all legislative, regulatory and safety requirements.



Inclusions

LED downlights to all main living areas

2700mm ceiling height throughout dwelling as per plan

25 year structural guarantee

Landscaping to front & rear, including letter box, lawn, bark, and plants

Footings and siteworks costs

Fencing to side and rear boundaries as required

Driveway and 900mm concrete paths

5KW Split system airconditioning to main living area Laminate floors to main living area Carpet to bedrooms/ upstairs (if applicable)

600mm oven in stainless steel appliances

Holland blinds to all bedrooms, Vertical blinds to all main living areas excluding wet areas