




THE
RIDGE
ON BRANYAN

STAGE 8



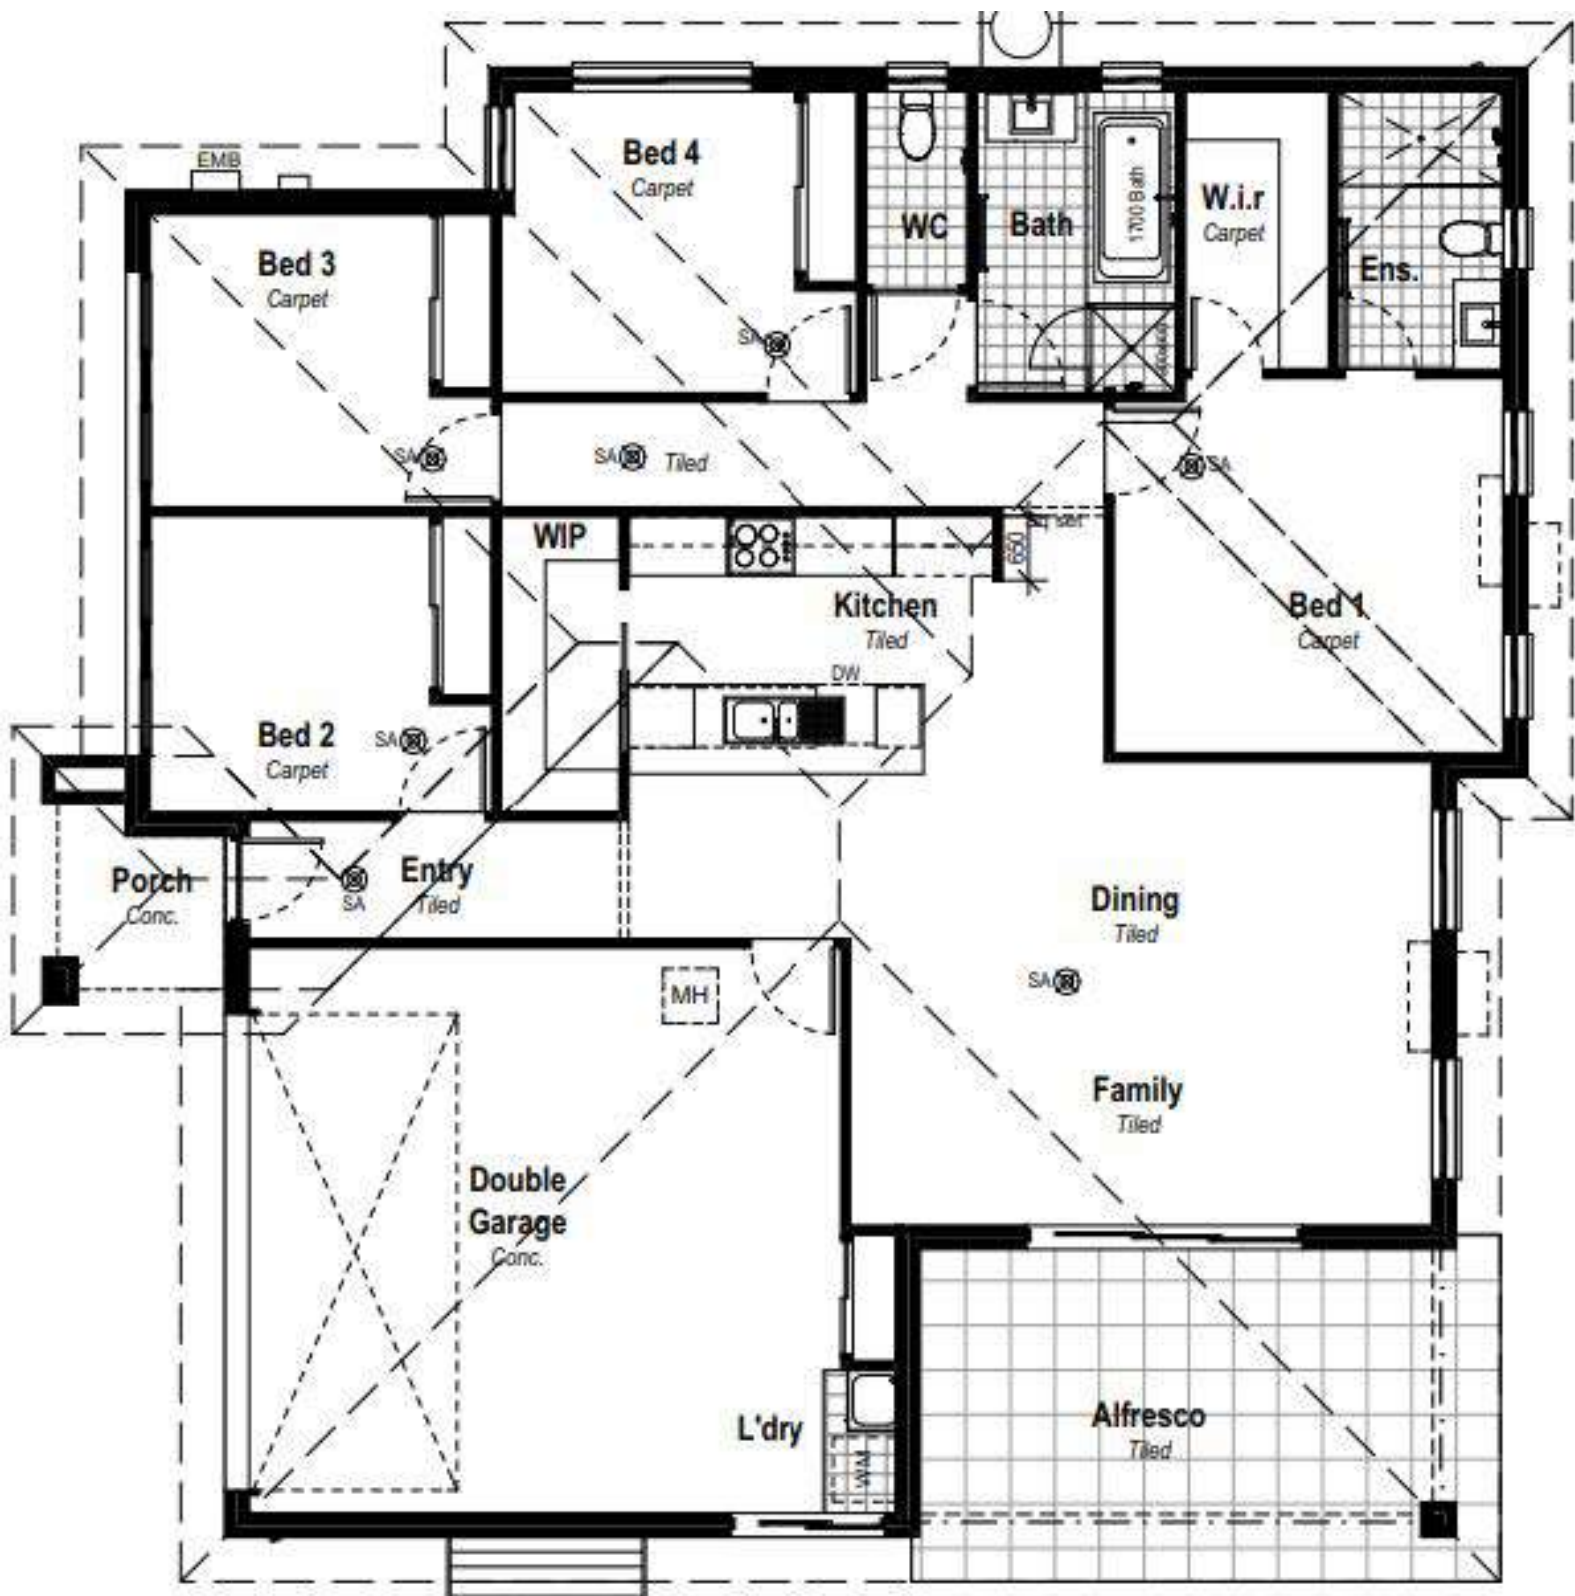

Specification

PRE-CONSTRUCTION

- HIA fixed site works.
- Plans - Specifications.
- Engineers soil report & slab design.
- Council building application fees.

SITE WORKS FOUNDATIONS & CONNECTIONS

- Site scrape and/or balanced cut & fill excavation for up to 1500mm site fall over the building platform.
- Engineer designed concrete slab to suit up to "H2" slab with bulk concrete piling (up to and including a depth of 600mm).
- Termite treatment to slab penetrations and physical perimeter barrier.
- Sewer & storm water connections to existing serviceable connection points for sites up to 600m² in size with a standard 6 meter set back from front boundary (battle-axe, other odd shaped blocks and blocks where service connection exceeds standard allowances may incur extra service costs).
- Eight (8) meters plan length of electrical mains.
- Water connection from pre-tapped water main up to and including six (6) meter setback to house.
- House constructed for "N2" wind rating conditions (W33).
- No allowance is made for retaining walls.

ENERGY EFFICIENCY

- Bulk ceiling insulation, rating R2.5, to ceiling area.
- Double sided foil wall-wrap to external stud walls.
- Energy efficient aluminium improved windows and sliding door units
- Weather stripping to hinged external doors.
- Electric hot water system.
- 500 KPA water pressure limiting device.
- LED down-lights.
- Approximately 1.8kw solar power system.

BRICKS, WINDOWS, ROOFING AND GARAGE

- Colorbond roof.
- Colorbond fascia & gutter from the standard builders' range of colours.
- Select range of clay bricks from the builder's standard range.
- Natural mortar.
- Powder coated aluminium windows from the standard builders' range of colours, with obscure glass to wet areas.
- Keyed window locks to all opening sashes and sliding doors.
- Auto Sectional garage door to garage from the standard builders' range of colours and two (2) handsets.

KITCHEN

- 20mm manufactured stone benchtops.
- Laminate finish cupboards from the standard builder's range of laminates.
- Soft close cabinetry to cupboards
- Door handles from the standard builder's range.
- 600mm under-bench oven.
- Laminate finish microwave oven provision to cabinetry.
- Electric ceramic 600mm cooktop.
- Freestanding stainless-steel dishwasher.
- Stainless steel 600mm slide-out rangehood.
- 1¾ bowl stainless steel kitchen sink.
- Chrome gooseneck sink mixer.
- Cold water-point to fridge space for an ice maker.
- Bulkhead above kitchen overhead cupboards.

CERAMIC TILING

- Bathroom & ensuite floors, and - 2000mm high to showers,
- 600mm above bath (nominal),
- 200mm skirting tile.
- Kitchen tiled splashback:
- 600mm high off bench.
- Toilet & Laundry floors and, - 400mm splash back over tub - 200mm skirting tiles

No allowance has been made for frieze, decorator tiles, or laying of border tiles, 45-degree patterns or floor feature tile layouts.

Specification

BATHROOM, ENSUITE & TOILETS

- Wall-hung vanities with 20mm stone bench tops from the standard builder's range
- Door handles from the standard builder's range.
- Clear laminated glass shower screens with powder coated aluminium frames from the standard builder's range of colours.
- 1500mm white acrylic back to wall freestanding bath
- 900mm high polished edge mirrors fitted to the same width as the vanity unit.
- Chrome mixer tapware, double towel rails and toilet roll holders.
- Vitreous China close coupled toilet suites.
- Semi-inset basins (or semi recessed as required).
- Shower on rail to bathroom and ensuite showers.

ELECTRICAL

- Earth leakage safety switch & circuit breakers.
- Single phase underground power connection from existing supply point.
- Meter box will be installed on the side nearest to the mains connection point.
- One (1) double power point to each room and as per electrical plan.
- One (1) 240-volt downlight point to each room as per electrical plan.
- Two (2) external parafood light points.
- Two (2) television points complete with 5 lineal meters of cable and no antenna.
- Smoke detectors hard wired with battery backup.
- Pre-wiring for two (2) Telstra phone points.
- Exhaust fan to bathroom and ensuite.
- Single GPO to microwave oven provision in kitchen.
- USB/double power point to the end of kitchen cabinetry.

STANDARD INTERNAL AND EXTERNAL FEATURES

- 90mm Bluescope Truecore steel frame.
- 2550mm ceiling heights throughout (ground level only in 2 storey homes).
- Round aluminium powder-coated handrail and vertical balustrade to external balcony as selected from builders' standard range where applicable.
- Paint grade front door with clear glazing.
- Paint grade hinged doors to other external doors if applicable.
- Paint grade flush panel internal passage doors.
- Magnetic door stops from builders' standard range to passage doors.
- Vinyl sliders from builders' standard range to wardrobe doors.
- Builders range exterior leverset to front door
- Interior leverset to internal doors.
- 90mm paint grade coved cornice.
- 41mm paint grade splayed architraves.
- 67mm paint grade splayed skirting.
- Paint: - Three (3) coat internal paint system - 2 colours allowed i.e. 1 colour to wall and 1 colour to timber work, - Two (2) coats to ceiling to Paint Manufacturers standard specifications, - Two (2) coat external paint system to external trim and doors to paint manufacturers standard specifications.
- 45 ltr laundry trough and cabinet.
- Two (2) external garden hose taps.
- AAA rated water saving shower heads and tap-ware.
- Internal & external builders house clean and site clean after construction.
- Carpet grade staircase with painted timber balustrade for staircases as selected from builders' standard range.

WARRANTIES

- Statutory maintenance period.
- Statutory structural guarantee period.

Specification

TURN KEY PACKAGE

PRE-CONSTRUCTION

- Provide additional council cross over and building application fees according to local city council.

SITE WORKS

- Provide additional driveway cut and excavation including kerb cut-out and removal when non-mountable kerb exists.

WINDOWS


- Powder coated aluminium diamond grill security screens.
- Powder coated frames to glass sliding doors.
- Powder coated frames to opening windows.

LANDSCAPING

- Provide up to 70 lineal meters of 1800mm high treated pine timber fencing.
- Provide (1) steel frame gate with treated pine palings.
- Provide up to 60 m2 of exposed aggregate driveway, front path and porch.
- Provide up to 300 m2 of A-Grade turf.
- Provide one (1) 15m2 garden bed including clay paver edge, builders' range plants and mulch.

INTERNAL AND EXTERNAL FEATURES

- Provide carpet to all bedrooms and living rooms as selected from the builders' standard range.
- Provide main floor tiles to all other internal areas (excluding garage).
- Provide suitable external grade tile finish to alfresco slab as selected from the builders' standard range.
- Provide a fold down wall mounted clothes line as selected from the builders' standard range.
- Provide a TV antenna and booster (as required) to roof as selected from the builders' standard range.
- Provide a letter box as selected from builders' standard range.
- Provide Roller blinds throughout. (Excluding Wet Rooms)
- Provide (1) white fan/light to all bedrooms.
- Provide (1) split system A/C from builders' standard range to living room and (1) to master bedroom.
- Provide internal & external builders house clean




IMPORTANT NOTES

- Final areas & dimensions are subject to design changes, council approval and field survey and may differ from those shown on this plan.
- Levels shown are referenced to the Australian Heights Datum (AHD) and represent the completed surface.
- The proposed contours, fill levels and retaining wall details are compiled from engineering designs provided by Empire Engineering Pty Ltd in August 2024.
- This plan was prepared to satisfy Section 11 of the Land Sales Act QLD 1994.
- Builders shall not build off the design levels shown; a site survey is required.
- These notes are an integral part of this plan.
- Earthworks fill on the subject allotment will be undertaken and compacted in accordance with the provisions of AS3798 under Level 1 supervision.
- At the time of preparing this plan, the location of any easements may not have been finalised. A relevant Authority may require easements as a condition of any approval or as a condition of sealing this plan. The Seller reserves the right to include such easements on the final plan.

DIAGRAM

Scale 1:400



FILL DEPTH RANGE		
DEPTH (METRE)	RANGE	DEPTH
0.01	to 0.25	0.25
0.25	to 0.5	0.5
0.5	to 0.75	0.75
0.75	to 1.0	1.0
1.0	to 1.25	1.25
1.25	to 1.5	1.5

Retaining Wall Legend

- Retaining Wall
- HRW - Height of Retaining Wall
- AHRW - Average Height of Retaining Wall

Height Labels are on the inside of the Retaining Wall.

Insite Planning and Surveying Pty Ltd (ACN 628 808 321)
(Trading as InsiteSJC) certifies that the details shown on
this plan to plan, are correct.

P. Metcalfe
Cadastral Surveyor/Delegate

10/10/24
Date

DISCLOSURE PLAN

Proposed Lot 41
Cancelling part of Lot 4 on C37850
THE RIDGE
Stage 8



47 Barolin Street
PO Box 1073
SUNDABERG QLD 4670

ABN 59 629 819 830
Phone: 07 4151 6677

admin@insiteajc.com.au
www.insiteajc.com.au

PARISH: SUNDABERG
COUNTY: COOK
LOCALITY: BRANYAN

PLAN REFERENCE NO.
GC15-401-41